


Загрузить ▾ →

Службы и процессы systemd

Сохранить ▾ →





Внимание!




Службы и процессы systemd

Настройка работы служб и процессов системы

Системные юниты → Пользовательские юниты → Конфигурационные файлы → Сессии → Таймеры →

Все ▾

☐ Показать не активные
☐ Показать не загруженные

avahi

	Настройка в конфигурации			Настройка в системе			Имя юнита
	Автостарт	Автостоп	Блокировать	Автостарт	Запущен	Статус	
	☒	☐	☐	☒	☒	активно	avahi-daemon.service
							
							
							
							
							
							
							
							
							
							
							

Служба: avahi-daemon.service
Описание: Avahi mDNS/DNS SD-Stack


Загрузить ▾ →

Службы и процессы systemd

Сохранить ▾ →





Внимание!




Службы и процессы systemd

Настройка работы служб и процессов системы

Системные юниты →

Пользовательские юниты →

Конфигурационные файлы →

Сессии →

Таймеры →

Все ▾

☐ Показать не активные
 ☐ Показать не загруженные

avahi

	Настройка в конфигурации			Настройка в системе			Имя юнита
	Автостарт	Автостоп	Блокировать	Автостарт	Запущен	Статус	
	☒	☐	☐	☒	☒	активно	avahi-daemon.service
							avahi-daemon.service
							Описание: Avahi mDNS/DNS SD-Stack Автостарт: Включен Статус загрузки: Загружено Статус работы: Активно Файл: /usr/lib/systemd/system/avahi-daemon.service Активирован: 12:11:33 04.03.2024 Деактивирован: нет данных
							
							
							
							
							
							
							
							

Служба: avachi-daemon.service
Описание: Avahi mDNS/DNS SD-Stack

 Загрузить ▾ →
 Службы и процессы systemd
 Сохранить ▾ →  - □ ×

 **Внимание!**



Службы и процессы systemd
 Настройка работы служб и процессов системы

Системные юниты → Пользовательские юниты → Конфигурационные файлы → Сессии → Таймеры →

Все ▾ ☐ Показать не активные ☐ Показать не загруженные avahi

	Настройка в конфигурации			Настройка в системе			Имя юнита
	Автостарт	Автостоп	Блокировать	Автостарт	Запущен	Статус	
	☒	☐	☐	☒	☒	активно	avahi-daemon.service
							Обновить
							Запустить/Остановить
							Перезапустить
							Перезагрузить настройки
							Состояние →
							Показать лог →
							Показать файл-источник →
							Свойства →

Служба: avahi-daemon.service
 Описание: Avahi mDNS/DNS SD-Stack

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Статус сервисов системы

mmx166-pc
 State: **running**
 Jobs: 0 queued
 Failed: 0 units
 Since: Wed 2024-02-21 16:22:50 +06, 51min ago
 CGroup: /

- └─init.scope
 └─1 /sbin/init
- └─system.slice
 └─NetworkManager.service
 └─9141 /usr/bin/NetworkManager --no-daemon
- └─accounts-daemon.service
 └─9679 /usr/lib/accounts-daemon
- └─avahi-daemon.service
 └─9142 "avahi-daemon: running mmx166-pc.local"
 └─9189 "avahi-daemon: chroot helper"
- └─avahi-dnssconfd.service
 └─9143 /usr/bin/avahi-dnssconfd -s
- └─bluetooth.service
 └─9144 /usr/lib/bluetooth/bluetoothd
- └─colord.service
 └─9435 /usr/lib/colord
- └─cups.service
 └─9354 /usr/bin/cupsd -l
- └─dbus-broker.service
 └─8992 /usr/bin/dbus-broker-launch --scope system --audit
 └─9020 dbus-broker --log 4 --controller 9 --machine-id 096bc1cc4dfc0301e6d57a7b202a415b --max-bytes 536870912 --max-fds 4096 --max-matches 131072 --audit
- └─lightdm-plymouth.service
 └─9669 /usr/bin/lightdm
 └─9678 /usr/lib/Xorg :0 -seat seat0 -auth /run/lightdm/root/:0 -nolisten tcp vt7 -novtswitch
- └─media-Data.mount
 └─9674 /usr/bin/udevadm settle --delay=4 --media-Data=...

Описание: Avahi mDNS/DNS SD-Stack

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Статус сервисов пользователя

mmx166-pc
 State: **running**
 Jobs: 0 queued
 Failed: 0 units
 Since: Thu 2024-02-22 09:06:57 +06, 1h 47min ago
 CGroup: /user.slice/user-1000.slice/user@1000.service

- └─ app.slice
 ├── app-dbus\x2d:1.10\x2dorg.a11y.atspi.Registry.slice
 │ └─ dbus-:1.10-org.a11y.atspi.Registry@0.service
 │ └─ 10121 /usr/lib/at-spi2-registryd --use-gnome-session
 ├── at-spi-dbus-bus.service
 │ ├── 10108 /usr/lib/at-spi-bus-launcher
 │ └─ 10113 /usr/bin/dbus-broker-launch --config-file=/usr/share/defaults/at-spi2/accessibility.conf --
 └─ scope user
 ├── 10114 dbus-broker --log 4 --controller 9 --machine-id 096bc1cc4dfc0301e6d57a7b202a415b --
 └─ max-bytes 1000000000000000 --max-fds 6400000 --max-matches 5000000000
 ├── dconf.service
 │ └─ 21829 /usr/lib/dconf-service
 ├── gpg-agent.service
 │ └─ 10722 /usr/bin/gpg-agent --supervised
 ├── obex.service
 │ └─ 10691 /usr/lib/bluetooth/obexd
 ├── xdg-desktop-portal-gtk.service
 │ └─ 10834 /usr/lib/xdg-desktop-portal-gtk
 ├── xdg-permission-store.service
 │ └─ 10824 /usr/lib/xdg-permission-store
 ├── init.scope
 │ ├── 10036 /usr/lib/systemd/systemd --user
 │ └─ 10037 "(sd-pam)"
 └─ session.slice
 ├── dbus.service
 └─ 10060 /usr/bin/dbus-daemon --session --address=systemd: --nofork --nopidfile --systemd-

Описание:

07

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Установленные юнит-файлы

UNIT FILE	STATE	VENDOR PRESET
proc-sys-fs-binfmt_misc.automount	static	-
dev-hugepages.mount	static	-
dev-mqueue.mount	static	-
media-Data.mount	generated	-
proc-fs-nfsd.mount	static	-
proc-sys-fs-binfmt_misc.mount	disabled	disabled
sys-fs-fuse-connections.mount	static	-
sys-kernel-config.mount	static	-
sys-kernel-debug.mount	static	-
sys-kernel-tracing.mount	static	-
tmp.mount	static	-
var-lib-machines.mount	static	-
var-lib-nfs-rpc_pipefs.mount	static	-
brltty.path	disabled	disabled
brltty@.path	disabled	disabled
cups.path	enabled	disabled
gpm.path	static	-
ostree-finalize-staged.path	disabled	disabled
systemd-ask-password-console.path	static	-
systemd-ask-password-plymouth.path	static	-
systemd-ask-password-wall.path	static	-
vboxdrmlclient.path	static	-
vmware-networks.path	disabled	disabled
vmware-usbarbitrator.path	disabled	disabled
session-2.scope	transient	-
accounts-daemon.service	disabled	disabled
addshare.service	disabled	disabled
adsl.service	disabled	disabled
apparmor.service	enabled	disabled
arpables.service	disabled	disabled
atd.service	disabled	disabled

Описание: Avahi mDNS/DNS SD-Stack

08

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Список юнитов и состояния

UNIT	LOAD	ACTIVE	SUB
DESCRIPTION			
● boot.automount	not-found	inactive	dead
boot.automount			
proc-sys-fs-binfmt_misc.automount		loaded	active running
Arbitrary Executable File Formats File System Automount Point			
dev-bus-usb-001-009.device		loaded	active plugged
SP_150SU			
dev-disk-by\x2did-ata\x2dCT240BX500SSD1_2028E405CB4D.device			loaded
active plugged CT240BX500SSD1			
dev-disk-by\x2did-ata\x2dCT240BX500SSD1_2028E405CB4D\x2dpart1.device			
loaded active plugged CT240BX500SSD1 bios_boot			
dev-disk-by\x2did-ata\x2dCT240BX500SSD1_2028E405CB4D\x2dpart2.device			
loaded active plugged CT240BX500SSD1 EFI			
dev-disk-by\x2did-ata\x2dCT240BX500SSD1_2028E405CB4D\x2dpart3.device			
loaded active plugged CT240BX500SSD1 ublinux			
dev-disk-by\x2did-ata\x2dST500DM002\x2d1BD142_Z3TJ2HER.device			loaded
active plugged ST500DM002-1BD142			
dev-disk-by\x2did-ata\x2dST500DM002\x2d1BD142_Z3TJ2HER\x2dpart1.device			
loaded active plugged ST500DM002-1BD142 1			
dev-disk-by\x2did-ata\x2dST500DM002\x2d1BD142_Z3TJ2HER\x2dpart2.device			
loaded active plugged ST500DM002-1BD142 2			
dev-disk-by\x2did-ata\x2dST500DM002\x2d1BD142_Z3TJ2HER\x2dpart3.device			
loaded active plugged ST500DM002-1BD142 3			
dev-disk-by\x2did-usb\x2dADATA_SE800_2M372L11G72J\x2d0:0.device			loaded
active plugged SE800			
dev-disk-by\x2did-usb\x2dADATA_SE800_2M372L11G72J\x2d0:0\x2dpart1.device			
loaded active plugged SE800 bios_boot			
dev-disk-by\x2did-usb\x2dADATA_SE800_2M372L11G72J\x2d0:0\x2dpart2.device			
loaded active plugged SE800 EFI			
dev-disk-by\x2did-usb\x2dADATA_SE800_2M372L11G72J\x2d0:0\x2dpart3.device			
loaded active plugged SE800 ublinux			

Описание: Avahi mDNS/DNS SD-Stack

09

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Список сокетов и состояния

LISTEN	UNIT	ACTIVATES
/dev/rfkill		systemd-rfkill.socket systemd-rfkill.service
/run/avahi-daemon/socket		avahi-daemon.socket avahi-daemon.service
/run/cockpit/wsinstance/http.sock		cockpit-wsinstance-http.socket cockpit-wsinstance-http.service
/run/cockpit/wsinstance/https-factorysock		cockpit-wsinstance-https.socket cockpit-wsinstance-https.service
/run/cups/cups.sock		cups.socket cups.service
/run/dbus/system_bus_socket		dbus.socket dbus-broker.service
/run/dmeventd-client		dm-event.socket dm-event.service
/run/dmeventd-server		dm-event.socket dm-event.service
/run/initctl		systemd-initctl.socket systemd-initctl.service
/run/lvm/lvmpolld.socket		lvm2-lvmpolld.socket lvm2-lvmpolld.service
/run/systemd/coredump		systemd-coredump.socket systemd-coredump.service
/run/systemd/journal/dev-log		systemd-journald-dev-log.socket systemd-journald.service
/run/systemd/journal/socket		systemd-journald.socket systemd-journald.service
/run/systemd/journal/stdout		systemd-journald.socket systemd-journald.service
/run/systemd/journal/syslog		syslog.socket syslog.service
/run/udev/control		systemd-udev-control.socket systemd-udev-control.service
cockpit.socket		cockpit.socket cockpit.service
audit 1		systemd-journald-audit.socket systemd-journald.service
kobject-uevent 1		systemd-udev-kernel.socket systemd-udev-kernel.service
udev.service		systemd-udev.service systemd-udev.service

19 sockets listed.

Описание: Avahi mDNS/DNS SD-Stack

Загрузить ▾

Службы и процессы systemd


Сохранить ▾

Список таймеров и состояния

NEXT	LEFT	LAST	PASSED	UNIT	ACTIVATES
Fri 2024-02-23 00:00:00	+06 12h left	n/a	n/a	logrotate.timer	
logrotate.service					
Fri 2024-02-23 00:00:00	+06 12h left	n/a	n/a	shadow.timer	
shadow.service					
Fri 2024-02-23 04:24:35	+06 17h left	n/a	n/a	man-db.timer	man-
db.service					
Fri 2024-02-23 09:20:39	+06 21h left	Thu 2024-02-22 09:20:39	+06 2h 1min ago	systemd-tmpfiles-clean.timer	systemd-tmpfiles-
clean.service					
Fri 2024-02-23 11:22:34	+06 24h left	n/a	n/a	updatedb.timer	
updatedb.service					
Sat 2024-03-02 15:00:00	+06 1 week 2 days left	n/a	n/a	pamac-cleancache.timer	
pamac-cleancache.service					

6 timers listed.

Описание:

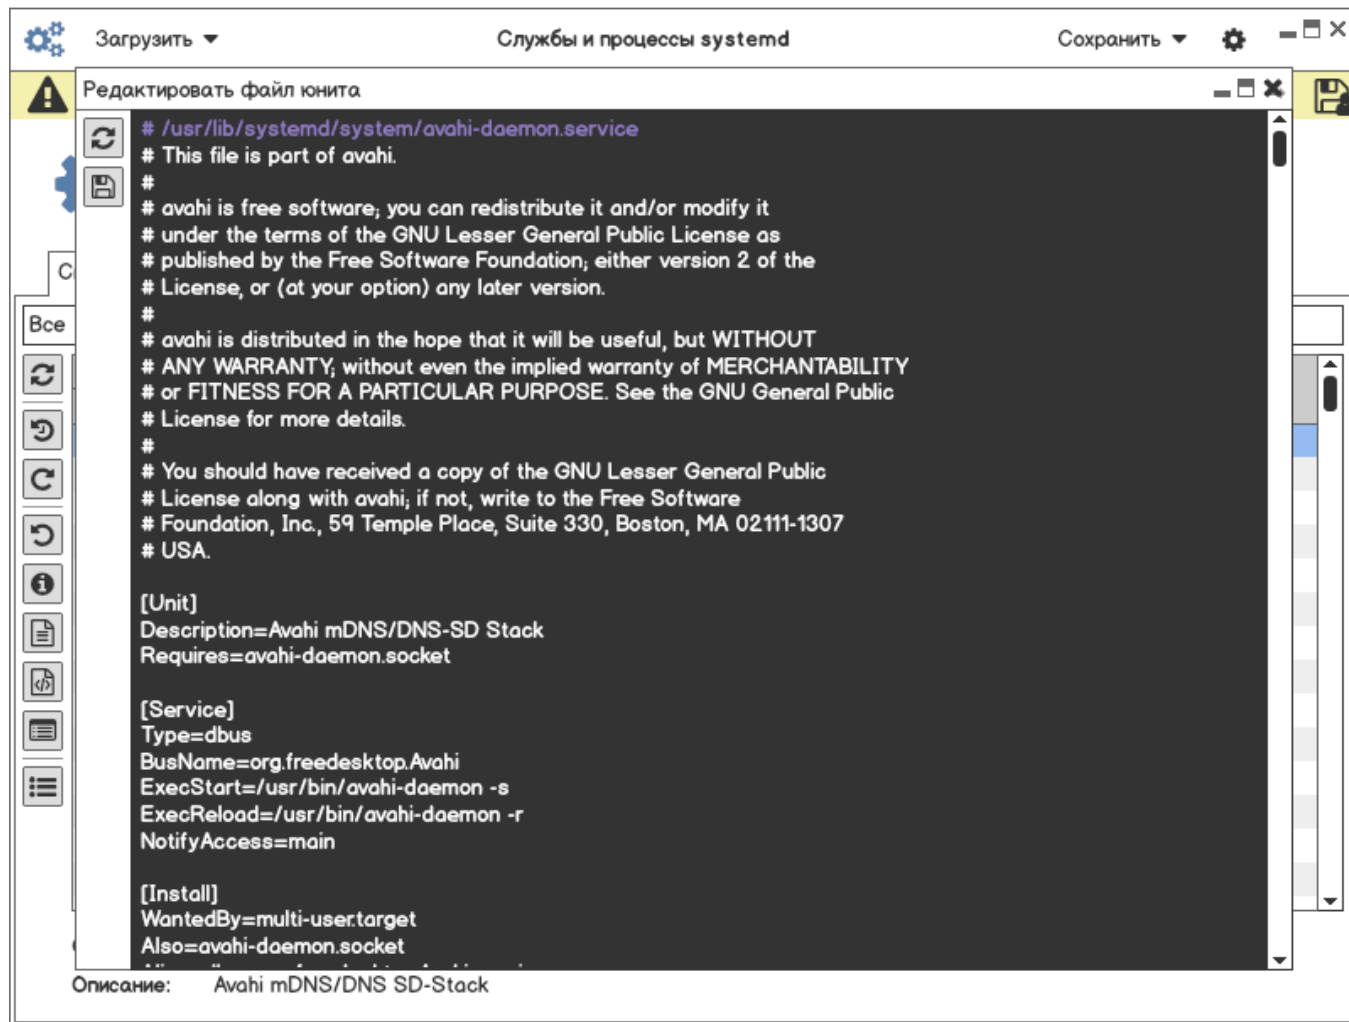

14

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Состояние avahi-daemon.service

- **avahi-daemon.service - Avahi mDNS/DNS-SD Stack**
 Loaded: loaded (/usr/lib/systemd/system/avahi-daemon.service; enabled; vendor preset: disabled)
 Active: **active (running)** since Mon 2023-06-26 09:56:52 +06; 6h ago
 TriggeredBy: ● avahi-daemon.socket
 Main PID: 9200 (avahi-daemon)
 Status: "avahi-daemon 0.8 starting up."
 Tasks: 2 (limit: 19041)
 Memory: 1.5M
 CPU: 507ms
 CGroup: /system.slice/avahi-daemon.service
 - └─9200 "avahi-daemon: running mmx166-pc.local"
 - └─9226 "avahi-daemon: chroot helper"

```

июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Registering new address record for fe80::6e8d:
24a9:9e57:deae on enp2s0.*.
июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Joining mDNS multicast group on interface vmnet1.IPv6 with
address fe80::250:56ff:fec0:1.
июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: New relevant interface vmnet1.IPv6 for mDNS.
июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Registering new address record for fe80::250:56ff:fec0:1 on
vmnet1.*.
июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Joining mDNS multicast group on interface vmnet8.IPv6
with address fe80::250:56ff:fec0:8.
июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: New relevant interface vmnet8.IPv6 for mDNS.
июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Registering new address record for fe80::250:56ff:fec0:8 on
vmnet8.*.
июн 26 09:56:57 mmx166-pc avahi-daemon[9200]: Joining mDNS multicast group on interface enp2s0.IPv4
with address 192.168.215.18.
июн 26 09:56:57 mmx166-pc avahi-daemon[9200]: New relevant interface enp2s0.IPv4 for mDNS.
июн 26 09:56:57 mmx166-pc avahi-daemon[9200]: Registering new address record for 192.168.215.18 on
enp2s0.IPv4.

```

Описание: Avahi mDNS/DNS SD-Stack

15

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Просмотр лога avahi-daemon.service

```
фес 21 16:22:54 mmx166-pc systemd[1]: Starting Avahi mDNS/DNS-SD Stack...
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: Found user 'avahi' (UID 84) and group 'avahi' (GID 84).
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: Successfully dropped root privileges.
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: avahi-daemon 0.8 starting up.
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: Successfully called chroot().
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: Successfully dropped remaining capabilities.
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: No service file found in /etc/avahi/services.
фес 21 16:22:54 mmx166-pc systemd[1]: Started Avahi mDNS/DNS-SD Stack.
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface loIPv4 with
address 127.0.0.1.
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: New relevant interface loIPv4 for mDNS.
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: Network interface enumeration completed.
фес 21 16:22:54 mmx166-pc avahi-daemon[9142]: Registering new address record for 127.0.0.1 on loIPv4.
фес 21 16:22:55 mmx166-pc avahi-daemon[9142]: Server startup complete. Host name is mmx166-pc.local.
Local service cookie is 882637154.
фес 21 16:22:55 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface vmnet1.IPv4 with
address 192.168.208.1.
фес 21 16:22:55 mmx166-pc avahi-daemon[9142]: New relevant interface vmnet1.IPv4 for mDNS.
фес 21 16:22:55 mmx166-pc avahi-daemon[9142]: Registering new address record for 192.168.208.1 on
vmnet1.IPv4.
фес 21 16:22:55 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface vmnet8.IPv4 with
address 192.168.222.1.
фес 21 16:22:55 mmx166-pc avahi-daemon[9142]: New relevant interface vmnet8.IPv4 for mDNS.
фес 21 16:22:55 mmx166-pc avahi-daemon[9142]: Registering new address record for 192.168.222.1 on
vmnet8.IPv4.
фес 21 16:22:58 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface enp2s0.IPv6 with
address fe80::bb6d:d853:6635:c011.
фес 21 16:22:58 mmx166-pc avahi-daemon[9142]: New relevant interface enp2s0.IPv6 for mDNS.
фес 21 16:22:58 mmx166-pc avahi-daemon[9142]: Registering new address record for
fe80::bb6d:d853:6635:c011 on enp2s0.*.
фес 21 16:23:05 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface enp2s0.IPv4 with
address 192.168.215.18.
```

Описание: Avahi mDNS/DNS SD-Stack

 Загрузить ▾ →
 Службы и процессы systemd
 Сохранить ▾ →   

Внимание! 


Службы и процессы systemd
 Настройка работы служб и процессов системы

Системные юниты → Пользовательские юниты → Конфигурационные файлы → Сессии → Таймеры →

Все ▾ ☐ Показать не активные ☐ Показать не загруженные

	Настройка в конфигурации			Настройка в системе			Имя юнита
	Автостарт	Автостоп	Блокировать	Автостарт	Запущен	Статус	
	☐	☐	☐	☒	☒	запущен	obex.service 
							
							
							
							
							
							
							
							
							
							
							
							

Служба: obex.service
 Описание: Service Bluetooth OBEX

18

Загрузить ▾ → Службы и процессы systemd Сохранить ▾ → ⚙️ →

Внимание!

Службы и процессы systemd

Настройка работы служб и процессов системы

Системные юниты Пользовательские юниты Конфигурационные файлы Сессии Таймеры

Все ▾ ☐ Показать не активные ☐ Показать не загруженные obex

Настройка в системе	Настройка в системе			Имя юнита
	Автоматически запускать	Автоматически запускать	Статус	
service	☒	☒	запущен	obex.service
mount				
swap				
socket				
target				
device				
automount				
timer				
path				
slice				
scope				

Служба: obex.service

Описание: Service Bluetooth OBEX

19

Загрузить ▾ → Службы и процессы systemd Сохранить ▾ → ⚙️ — □ ×

Внимание!

Службы и процессы systemd
Настройка работы служб и процессов системы

Системные юниты Пользовательские юниты Конфигурационные файлы Сессии Таймеры

Все ▾ ☐ Показать не активные ☐ Показать не загруженные obex

	Настройка в конфигурации			Настройка в системе			Имя юнита
	Автостарт	Автостоп	Блокировать	Автостарт	Запущен	Статус	
	☐	☐	☐	☒	☒	запущен	obex.service
							Обновить
							Запустить/Остановить
							Перезапустить
							Перезагрузить настройки
							Состояние →
							Показать лог →
							Показать файл-источник →
							Свойства →


Служба: obex.service


Описание: Service Bluetooth OBEX


The screenshot shows a window titled "Службы и процессы systemd" (Systemd Services and Processes). The window has a top bar with "Загрузить" (Load) on the left and "Сохранить" (Save) on the right, both with dropdown arrows. Below the title bar, there's a tab labeled "Состояние obex.service" (obex.service Status). The main content area displays the following information:

- obex.service - Bluetooth OBEX service
- Loaded: loaded (/usr/lib/systemd/user/obex.service; disabled; vendor preset: enabled)
- Active: **active (running)** since Wed 2024-03-06 09:13:57 +06; 3h 45min ago
- Main PID: 10771
- Tasks: 1 (limit: 19041)
- Memory: 1.8M
- CPU: 10ms
- CGroup: /user.slice/user-1000.slice/user@1000.service/app.slice/obex.service
 - └─10771 /usr/lib/bluetooth/obexd

At the bottom of the window, there is a description: "Описание: Service Bluetooth OBEX". The window also features a sidebar on the left with various icons and a vertical scrollbar on the right.

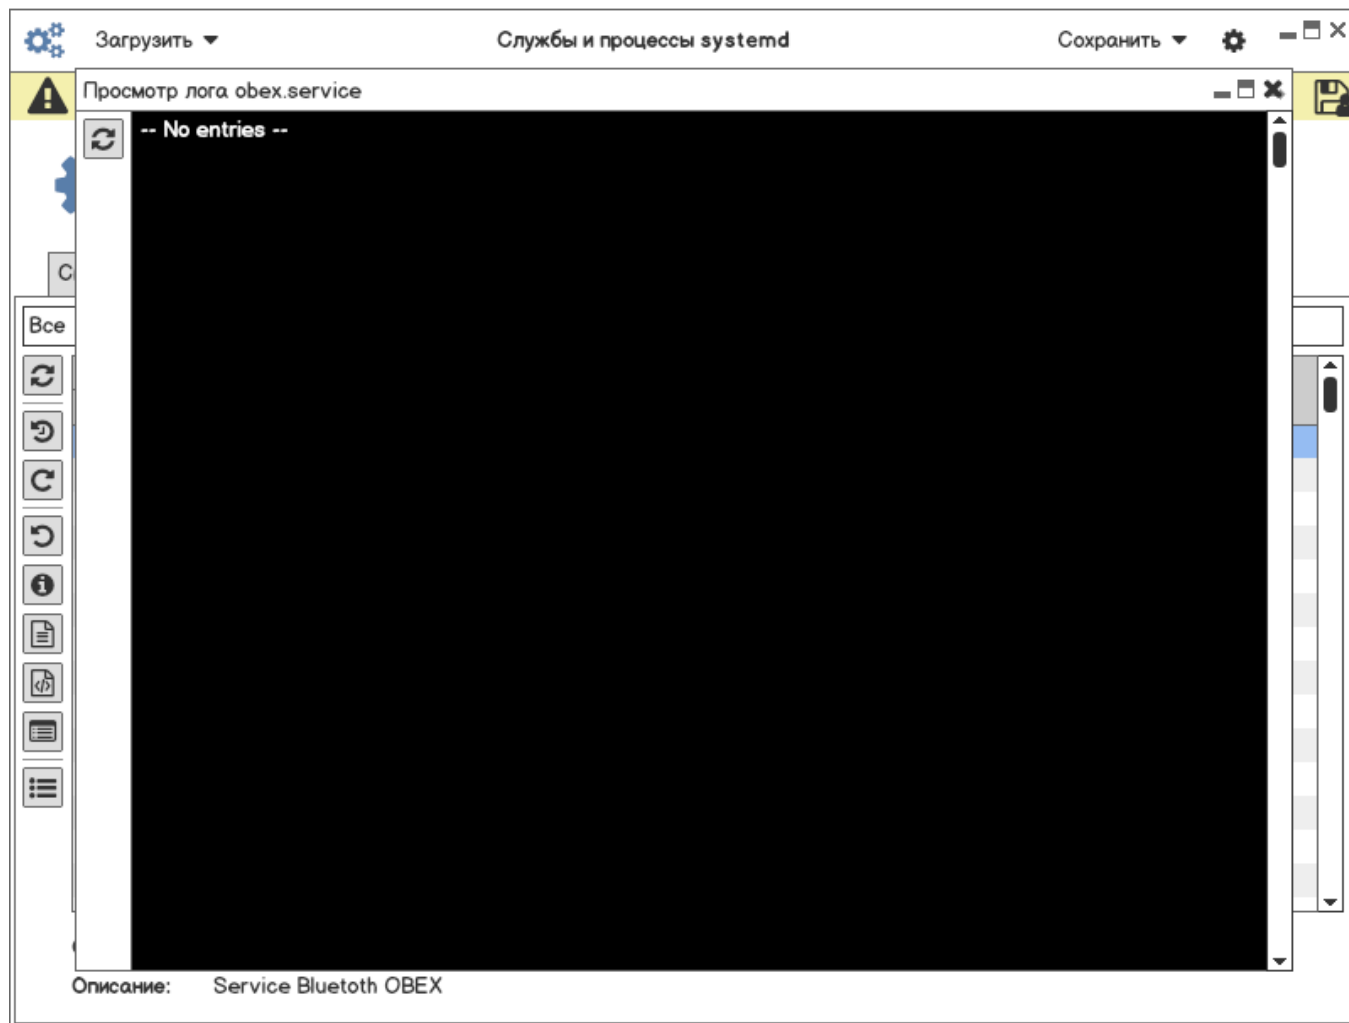

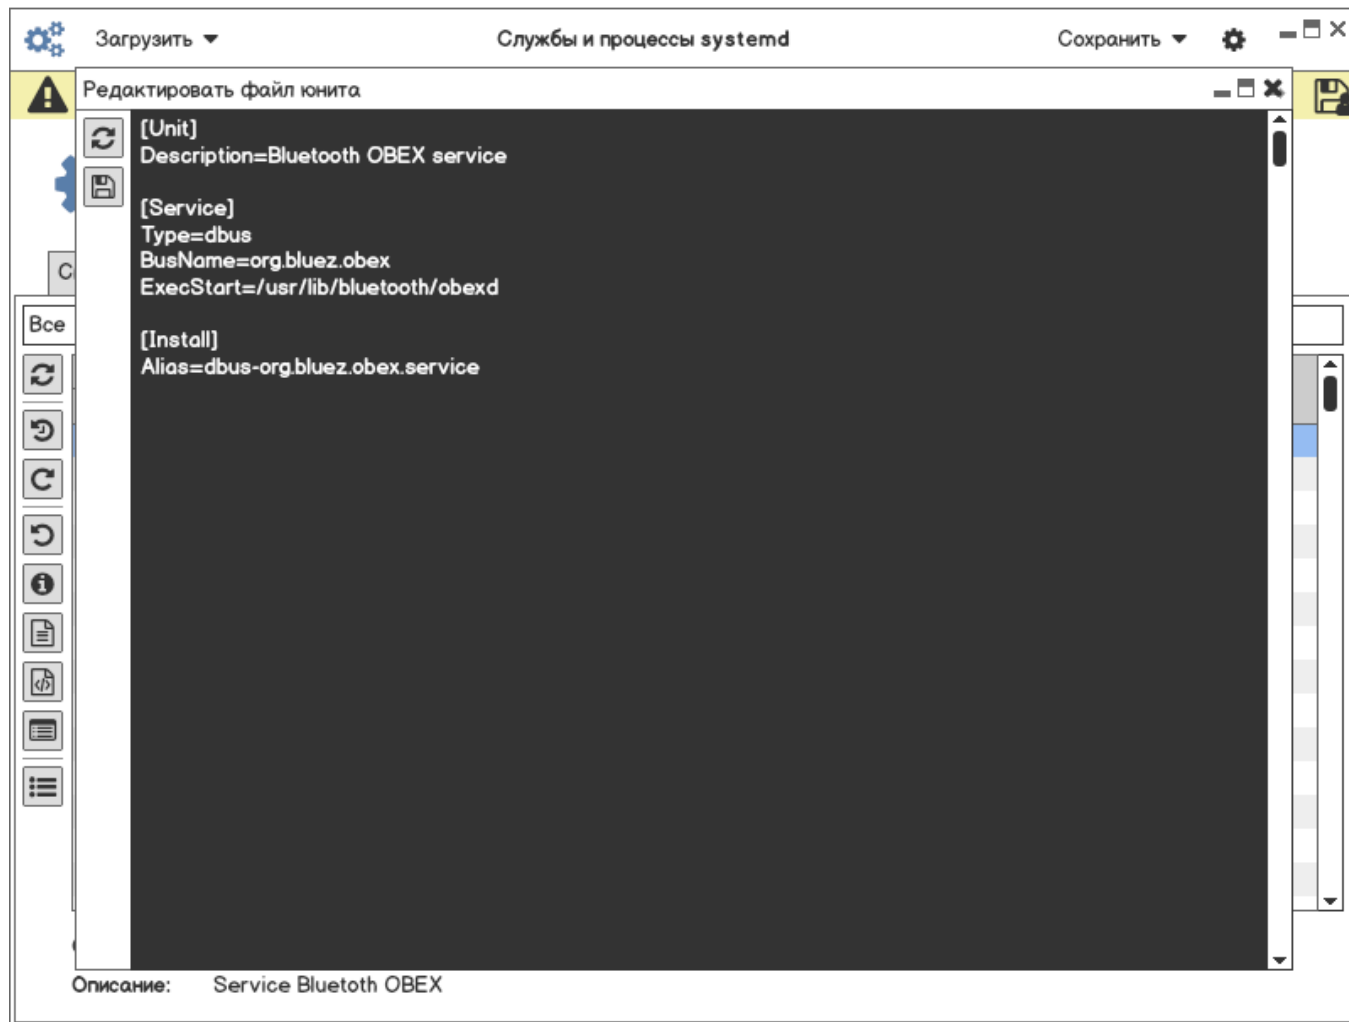

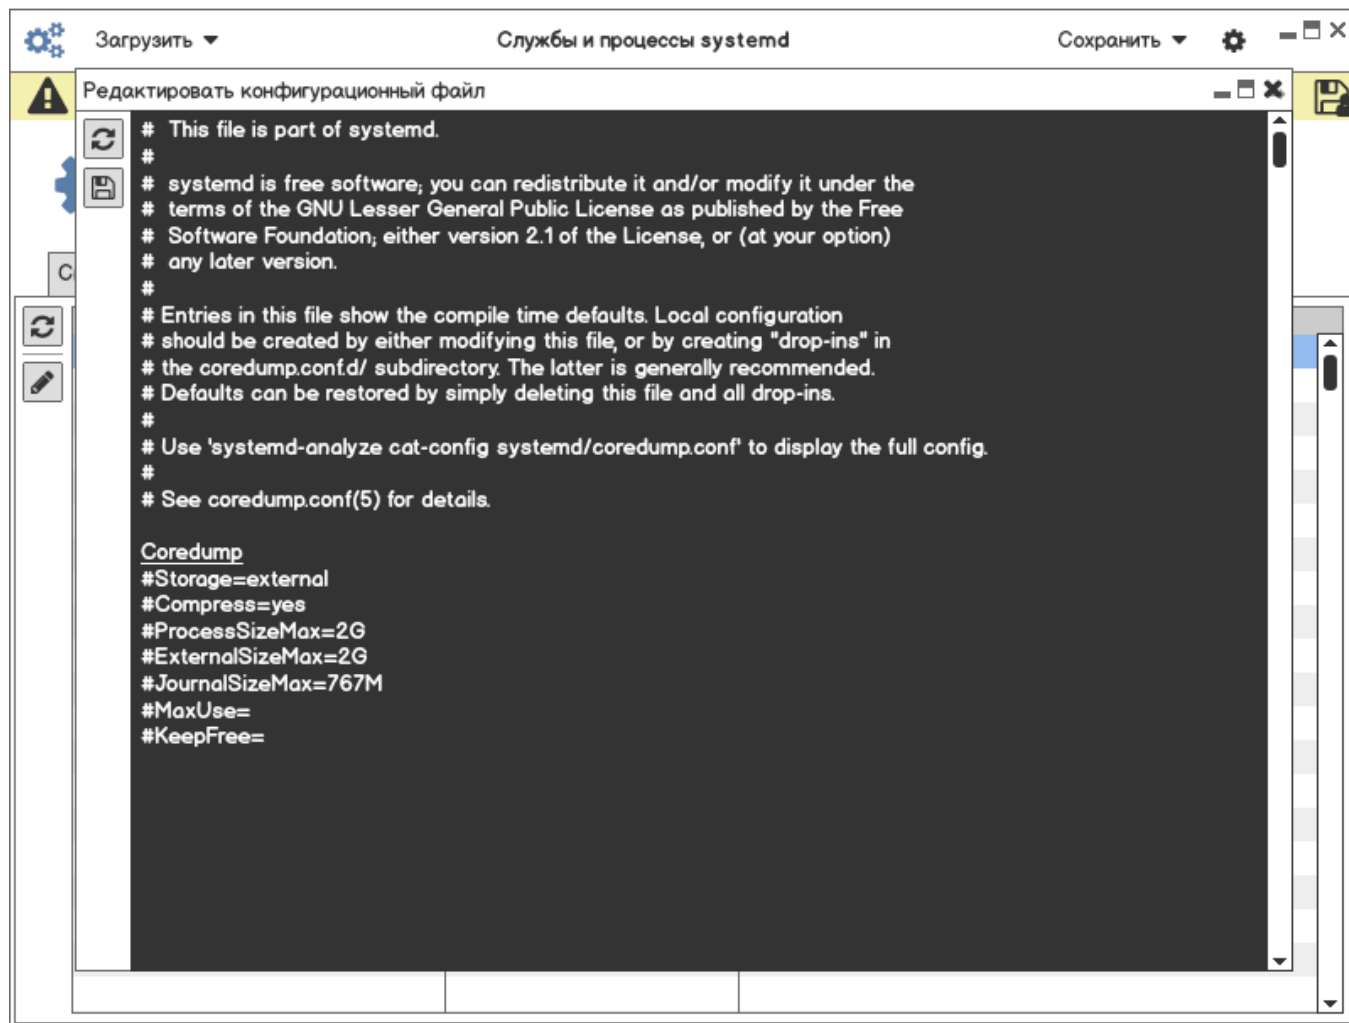


Загрузить ▾ →

Службы и процессы systemd

Сохранить ▾ →





Внимание!



Службы и процессы systemd

Настройка работы служб и процессов системы

Системные юниты →

Пользовательские юниты →

Конфигурационные файлы →

Сессии →

Таймеры →

Все ▾

☐ Показать не активные
 ☐ Показать не загруженные

avahi

	Настройка в конфигурации			Настройка в системе			Имя юнита
	Автостарт	Автостоп	Блокировать	Автостарт	Запущен	Статус	
	☒	☐	☐	☒	☒	активно	avahi-daemon.service
							
							
							
							
							
							
							
							
							
							
							

Служба: avachi-daemon.service

Описание: система обеспечивающая обнаружение сервисов в локальной сети

☒ Повысить права до root
 ☐ Справка
 ☐ О приложении →



