


[illegible]



Таймеры

avahi

☒

Описание: Avahi mDNS/DNS SD-Stack


Загрузить ▾

Службы и процессы systemd

Сохранить ▾





Внимание!




Службы и процессы systemd

Настройка работы служб и процессов системы

Системные юниты → Пользовательские юниты → Конфигурационные файлы → Сессии → Таймеры →

Все ▾


☐ Показать не активные
☐ Показать не загруженные

avahi

	Настройка в конфигурации			Настройка в системе			Служба
	Автостарт	Автостоп	Блокировать	Автостарт	Запущена	Юнит	
	☒	☐	☐	☒	☒	активно	avahi-daemon.service →
							
							
							
							
							
							
							

 Статус сервисов системы →
 Установленные юнит-файлы →
 Список юнитов и состояния →
 Список сокетов и состояния →
 Список таймеров и состояния →

Описание: Avahi mDNS/DNS SD-Stack



Таймеры

avahi



Описание: Avahi mDNS/DNS SD-Stack

Загрузить ▾

Службы и процессы systemd

Сохранить ▾

Статус сервисов системы

- mmx166-pc
 - State: **running**
 - Jobs: 0 queued
 - Failed: 0 units
 - Since: Wed 2024-02-21 16:22:50 +06; 51min ago
 - CGroup: /
 - init.scope
 - 1 /sbin/init
 - system.slice
 - NetworkManager.service
 - 9141 /usr/bin/NetworkManager --no-daemon
 - accounts-daemon.service
 - 9679 /usr/lib/accounts-daemon
 - avahi-daemon.service
 - 9142 "avahi-daemon: running mmx166-pc.local"
 - 9189 "avahi-daemon: chroot helper"
 - avahi-dnssconfd.service
 - 9143 /usr/bin/avahi-dnssconfd -s
 - bluetooth.service
 - 9144 /usr/lib/bluetooth/bluetoothd
 - colord.service
 - 9435 /usr/lib/colord
 - cups.service
 - 9354 /usr/bin/cupsd -l
 - dbus-broker.service
 - 8992 /usr/bin/dbus-broker-launch --scope system --audit
 - 9020 dbus-broker --log 4 --controller 9 --machine-id 096bc1cc4dfc0301e6d57a7b202a415b --max-bytes 536870912 --max-fds 4096 --max-matches 131072 --audit
 - lightdm-plymouth.service
 - 9669 /usr/bin/lightdm
 - 9678 /usr/lib/Xorg :0 -seat seat0 -auth /run/lightdm/root/:0 -nolisten tcp vt7 -novtswitch
 - media-Data.mount
 - 9674 /usr/bin/mount -t fuse -o uid=0,mode=0755 /media/Data /run/media/Data

Описание: Avahi mDNS/DNS SD-Stack

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Статус сервисов пользователя

mmx166-pc
 State: **running**
 Jobs: 0 queued
 Failed: 0 units
 Since: Thu 2024-02-22 09:06:57 +06; 1h 47min ago
 CGroup: /user.slice/user-1000.slice/user@1000.service

- app.slice
 - app-dbus\x2d:1.10\x2dorg.a11y.atspi.Registry.slice
 - dbus-:1.10-org.a11y.atspi.Registry@0.service
 - 10121 /usr/lib/at-spi2-registryd --use-gnome-session
 - at-spi-dbus-bus.service
 - 10108 /usr/lib/at-spi-bus-launcher
 - 10113 /usr/bin/dbus-broker-launch --config-file=/usr/share/defaults/at-spi2/accessibility.conf --
- scope user
 - 10114 dbus-broker --log 4 --controller 9 --machine-id 096bc1cc4dfc0301e6d57a7b202a415b --max-bytes 1000000000000000 --max-fds 6400000 --max-matches 5000000000
 - dconf.service
 - 21829 /usr/lib/dconf-service
 - gpg-agent.service
 - 10722 /usr/bin/gpg-agent --supervised
 - obex.service
 - 10691 /usr/lib/bluetooth/obexd
 - xdg-desktop-portal-gtk.service
 - 10834 /usr/lib/xdg-desktop-portal-gtk
 - xdg-permission-store.service
 - 10824 /usr/lib/xdg-permission-store
 - init.scope
 - 10036 /usr/lib/systemd/systemd --user
 - 10037 "(sd-pam)"
 - session.slice
 - dbus.service
 - 10060 /usr/bin/dbus-daemon --session --address=systemd: --nofork --nopidfile --systemd-

Описание:

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Установленные юнит-файлы

UNIT FILE	STATE	VENDOR PRESET
proc-sys-fs-binfmt_misc.automount	static	-
dev-hugepages.mount	static	-
dev-mqueue.mount	static	-
media-Data.mount	generated	-
proc-fs-nfsd.mount	static	-
proc-sys-fs-binfmt_misc.mount	disabled	disabled
sys-fs-fuse-connections.mount	static	-
sys-kernel-config.mount	static	-
sys-kernel-debug.mount	static	-
sys-kernel-tracing.mount	static	-
tmp.mount	static	-
var-lib-machines.mount	static	-
var-lib-nfs-rpc_pipefs.mount	static	-
brltty.path	disabled	disabled
brltty@.path	disabled	disabled
cups.path	enabled	disabled
gpm.path	static	-
ostree-finalize-staged.path	disabled	disabled
systemd-ask-password-console.path	static	-
systemd-ask-password-plymouth.path	static	-
systemd-ask-password-wall.path	static	-
vboxdrmsclient.path	static	-
vmware-networks.path	disabled	disabled
vmware-usbarbitrator.path	disabled	disabled
session-2.scope	transient	-
accounts-daemon.service	disabled	disabled
addshare.service	disabled	disabled
adsl.service	disabled	disabled
apparmor.service	enabled	disabled
arptables.service	disabled	disabled
atd.service	disabled	disabled

Описание: Avahi mDNS/DNS SD-Stack

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Список юнитов и состояния

UNIT	LOAD	ACTIVE	SUB
DESCRIPTION			
• boot.automount	not-found	inactive	dead
boot.automount			
proc-sys-fs-binfmt_misc.automount		loaded	active running
Arbitrary Executable File Formats File System Automount Point			
dev-bus-usb-001-009.device		loaded	active plugged
SP_150SU			
dev-disk-by\x2did-ata\x2dCT240BX500SSD1_2028E405CB4D.device			loaded
active plugged CT240BX500SSD1			
dev-disk-by\x2did-ata\x2dCT240BX500SSD1_2028E405CB4D\x2dpart1.device			
loaded active plugged CT240BX500SSD1 bios_boot			
dev-disk-by\x2did-ata\x2dCT240BX500SSD1_2028E405CB4D\x2dpart2.device			
loaded active plugged CT240BX500SSD1 EFI			
dev-disk-by\x2did-ata\x2dCT240BX500SSD1_2028E405CB4D\x2dpart3.device			
loaded active plugged CT240BX500SSD1 ublinux			
dev-disk-by\x2did-ata\x2dST500DM002\x2d1BD142_Z3TJ2HER.device			loaded
active plugged ST500DM002-1BD142			
dev-disk-by\x2did-ata\x2dST500DM002\x2d1BD142_Z3TJ2HER\x2dpart1.device			
loaded active plugged ST500DM002-1BD142 1			
dev-disk-by\x2did-ata\x2dST500DM002\x2d1BD142_Z3TJ2HER\x2dpart2.device			
loaded active plugged ST500DM002-1BD142 2			
dev-disk-by\x2did-ata\x2dST500DM002\x2d1BD142_Z3TJ2HER\x2dpart3.device			
loaded active plugged ST500DM002-1BD142 3			
dev-disk-by\x2did-usb\x2dADATA_SE800_2M372L11G72J\x2d0:0.device			loaded
active plugged SE800			
dev-disk-by\x2did-usb\x2dADATA_SE800_2M372L11G72J\x2d0:0\x2dpart1.device			
loaded active plugged SE800 bios_boot			
dev-disk-by\x2did-usb\x2dADATA_SE800_2M372L11G72J\x2d0:0\x2dpart2.device			
loaded active plugged SE800 EFI			
dev-disk-by\x2did-usb\x2dADATA_SE800_2M372L11G72J\x2d0:0\x2dpart3.device			
loaded active plugged SE800 ublinux			

Описание: Avahi mDNS/DNS SD-Stack

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Список сокетов и состояния

LISTEN	UNIT	ACTIVATES
/dev/rfkill		systemd-rfkill.socket systemd-rfkill.service
/run/avahi-daemon/socket		avahi-daemon.socket avahi-daemon.service
/run/cockpit/wsinstance/http.sock		cockpit-wsinstance-http.socket cockpit-wsinstance-
http.service		
/run/cockpit/wsinstance/https-factory.sock		cockpit-wsinstance-https.socket -
/run/cups/cups.sock		cups.socket cups.service
/run/dbus/system_bus_socket		dbus.socket dbus-broker.service
/run/dmeventd-client		dm-event.socket dm-event.service
/run/dmeventd-server		dm-event.socket dm-event.service
/run/initctl		systemd-initctl.socket systemd-
initctl.service		
/run/lvm/lvmpolld.socket		lvm2-lvmpolld.socket lvm2-lvmpolld.service
/run/systemd/coredump		systemd-coredump.socket -
/run/systemd/journal/dev-log		systemd-journald-dev-log.socket systemd-journald.service
/run/systemd/journal/socket		systemd-journald.socket systemd-
journald.service		
/run/systemd/journal/stdout		systemd-journald.socket systemd-
journald.service		
/run/systemd/journal/syslog		syslog.socket syslog.service
/run/udev/control		systemd-udev-control.socket systemd-
udev.service		
...9090		cockpit.socket cockpit.service
audit 1		systemd-journald-audit.socket systemd-journald.service
kobject-uevent 1		systemd-udev-kernel.socket systemd-
udev.service		
19 sockets listed.		

Описание: Avahi mDNS/DNS SD-Stack

Загрузить

Службы и процессы systemd


Сохранить


Список таймеров и состояния

NEXT	LEFT	LAST	PASSED	UNIT	ACTIVATES
Fri 2024-02-23 00:00:00 +06 12h left	n/a	n/a	logrotate.timer		
logrotate.service					
Fri 2024-02-23 00:00:00 +06 12h left	n/a	n/a	shadow.timer		
shadow.service					
Fri 2024-02-23 04:24:35 +06 17h left	n/a	n/a	man-db.timer	man-	
db.service					
Fri 2024-02-23 09:20:39 +06 21h left	Thu 2024-02-22 09:20:39 +06 2h 1min ago	systemd-tmpfiles-clean.timer	systemd-tmpfiles-clean.service		
Fri 2024-02-23 11:22:34 +06 24h left	n/a	n/a	updatedb.timer		
updatedb.service					
Sat 2024-03-02 15:00:00 +06 1 week 2 days left	n/a	n/a	pamac-cleancache.timer		
pamac-cleancache.service					

6 timers listed.

Описание:

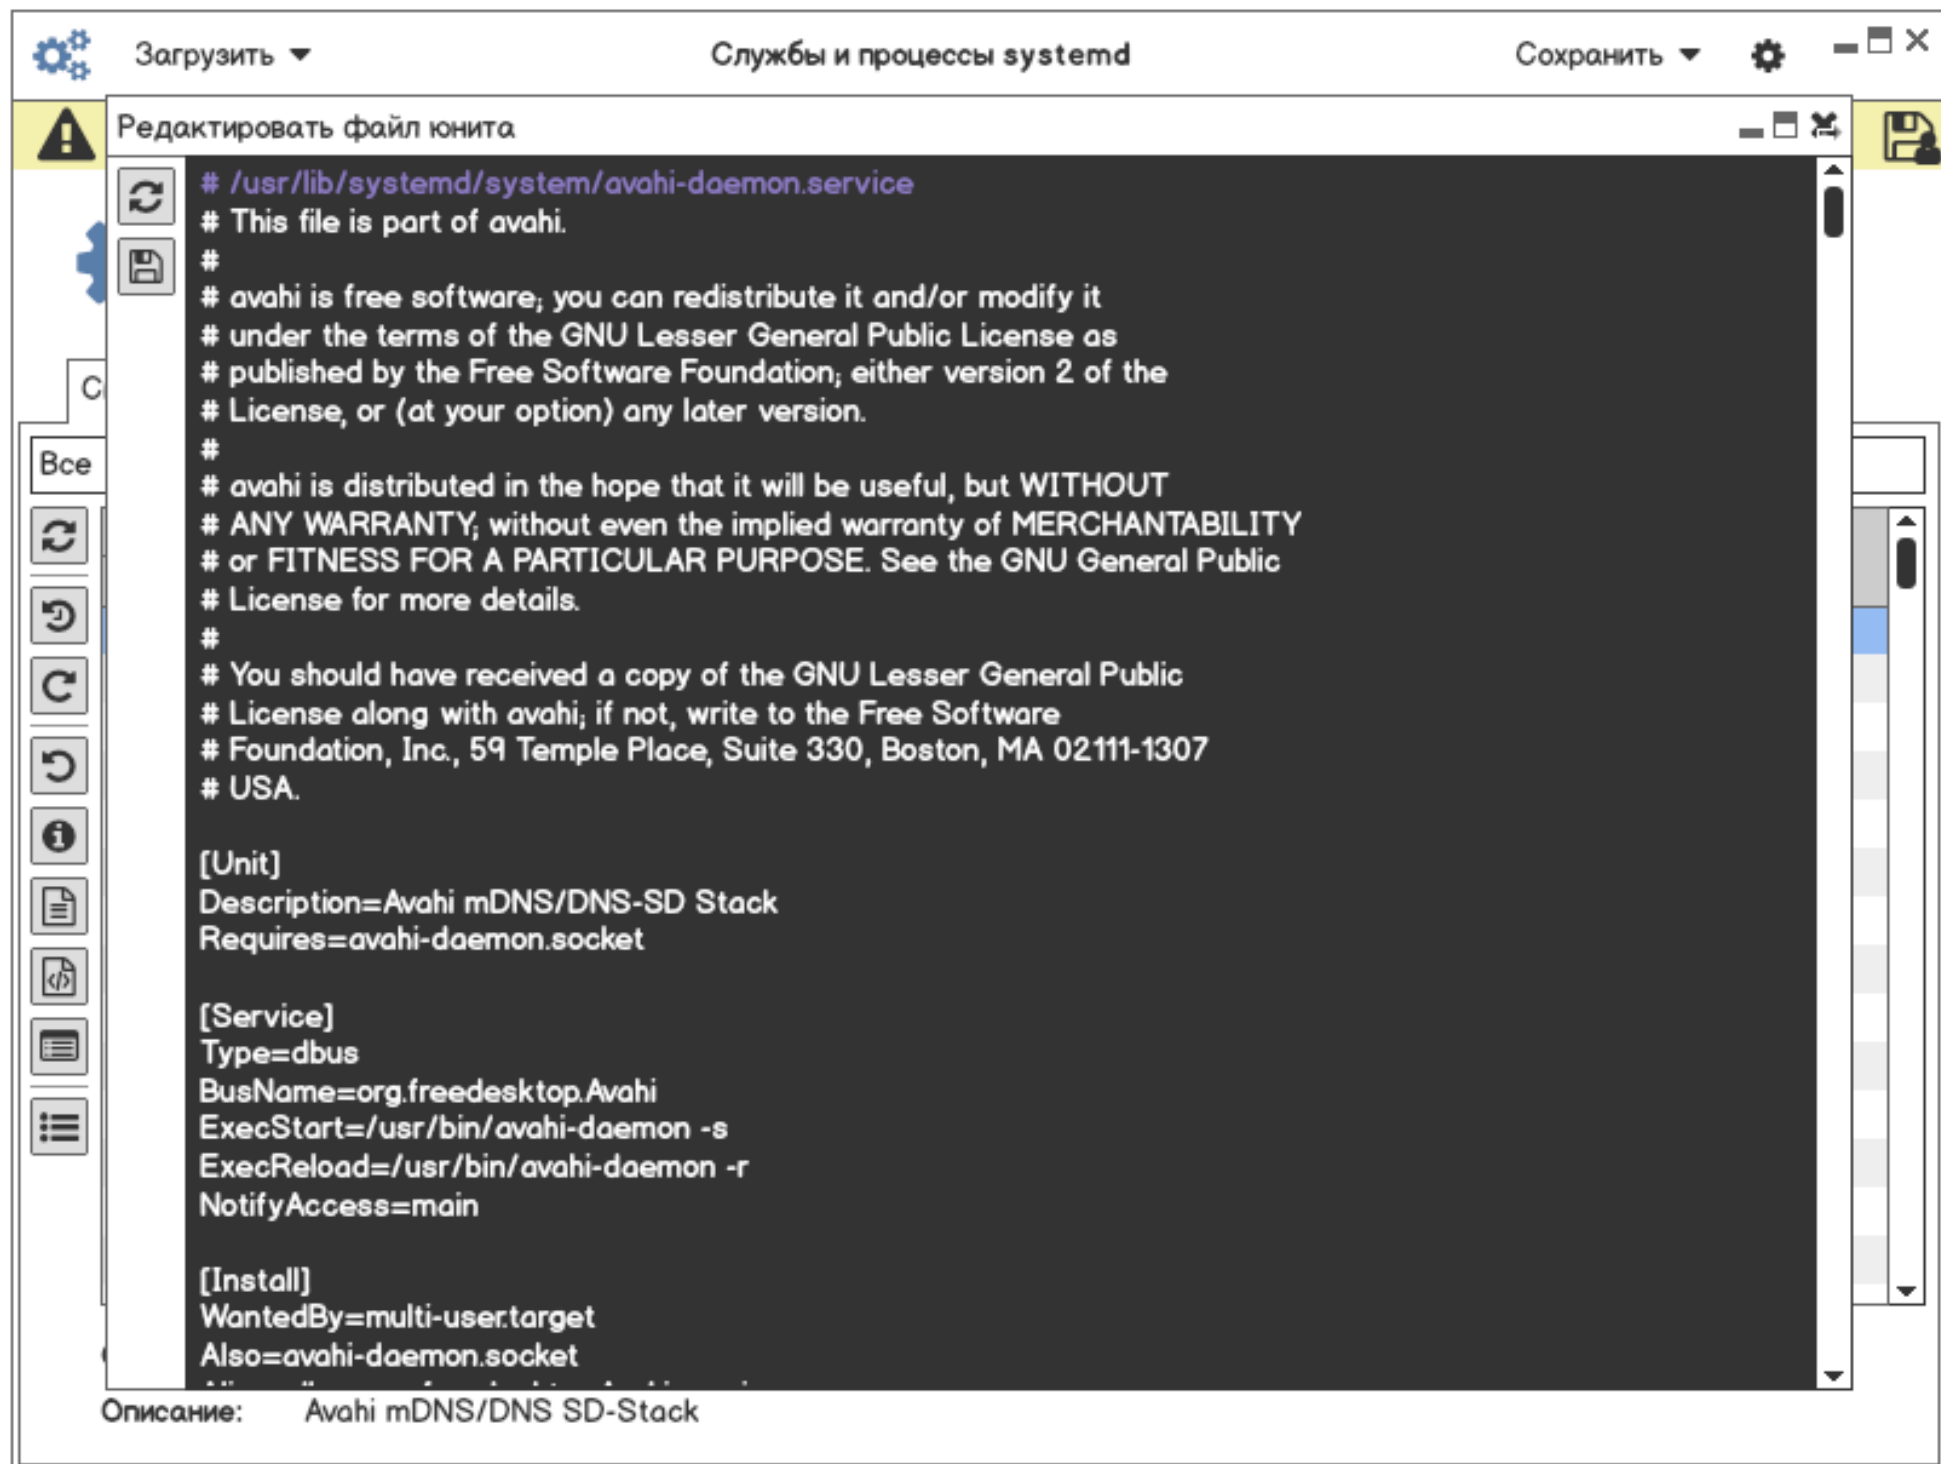

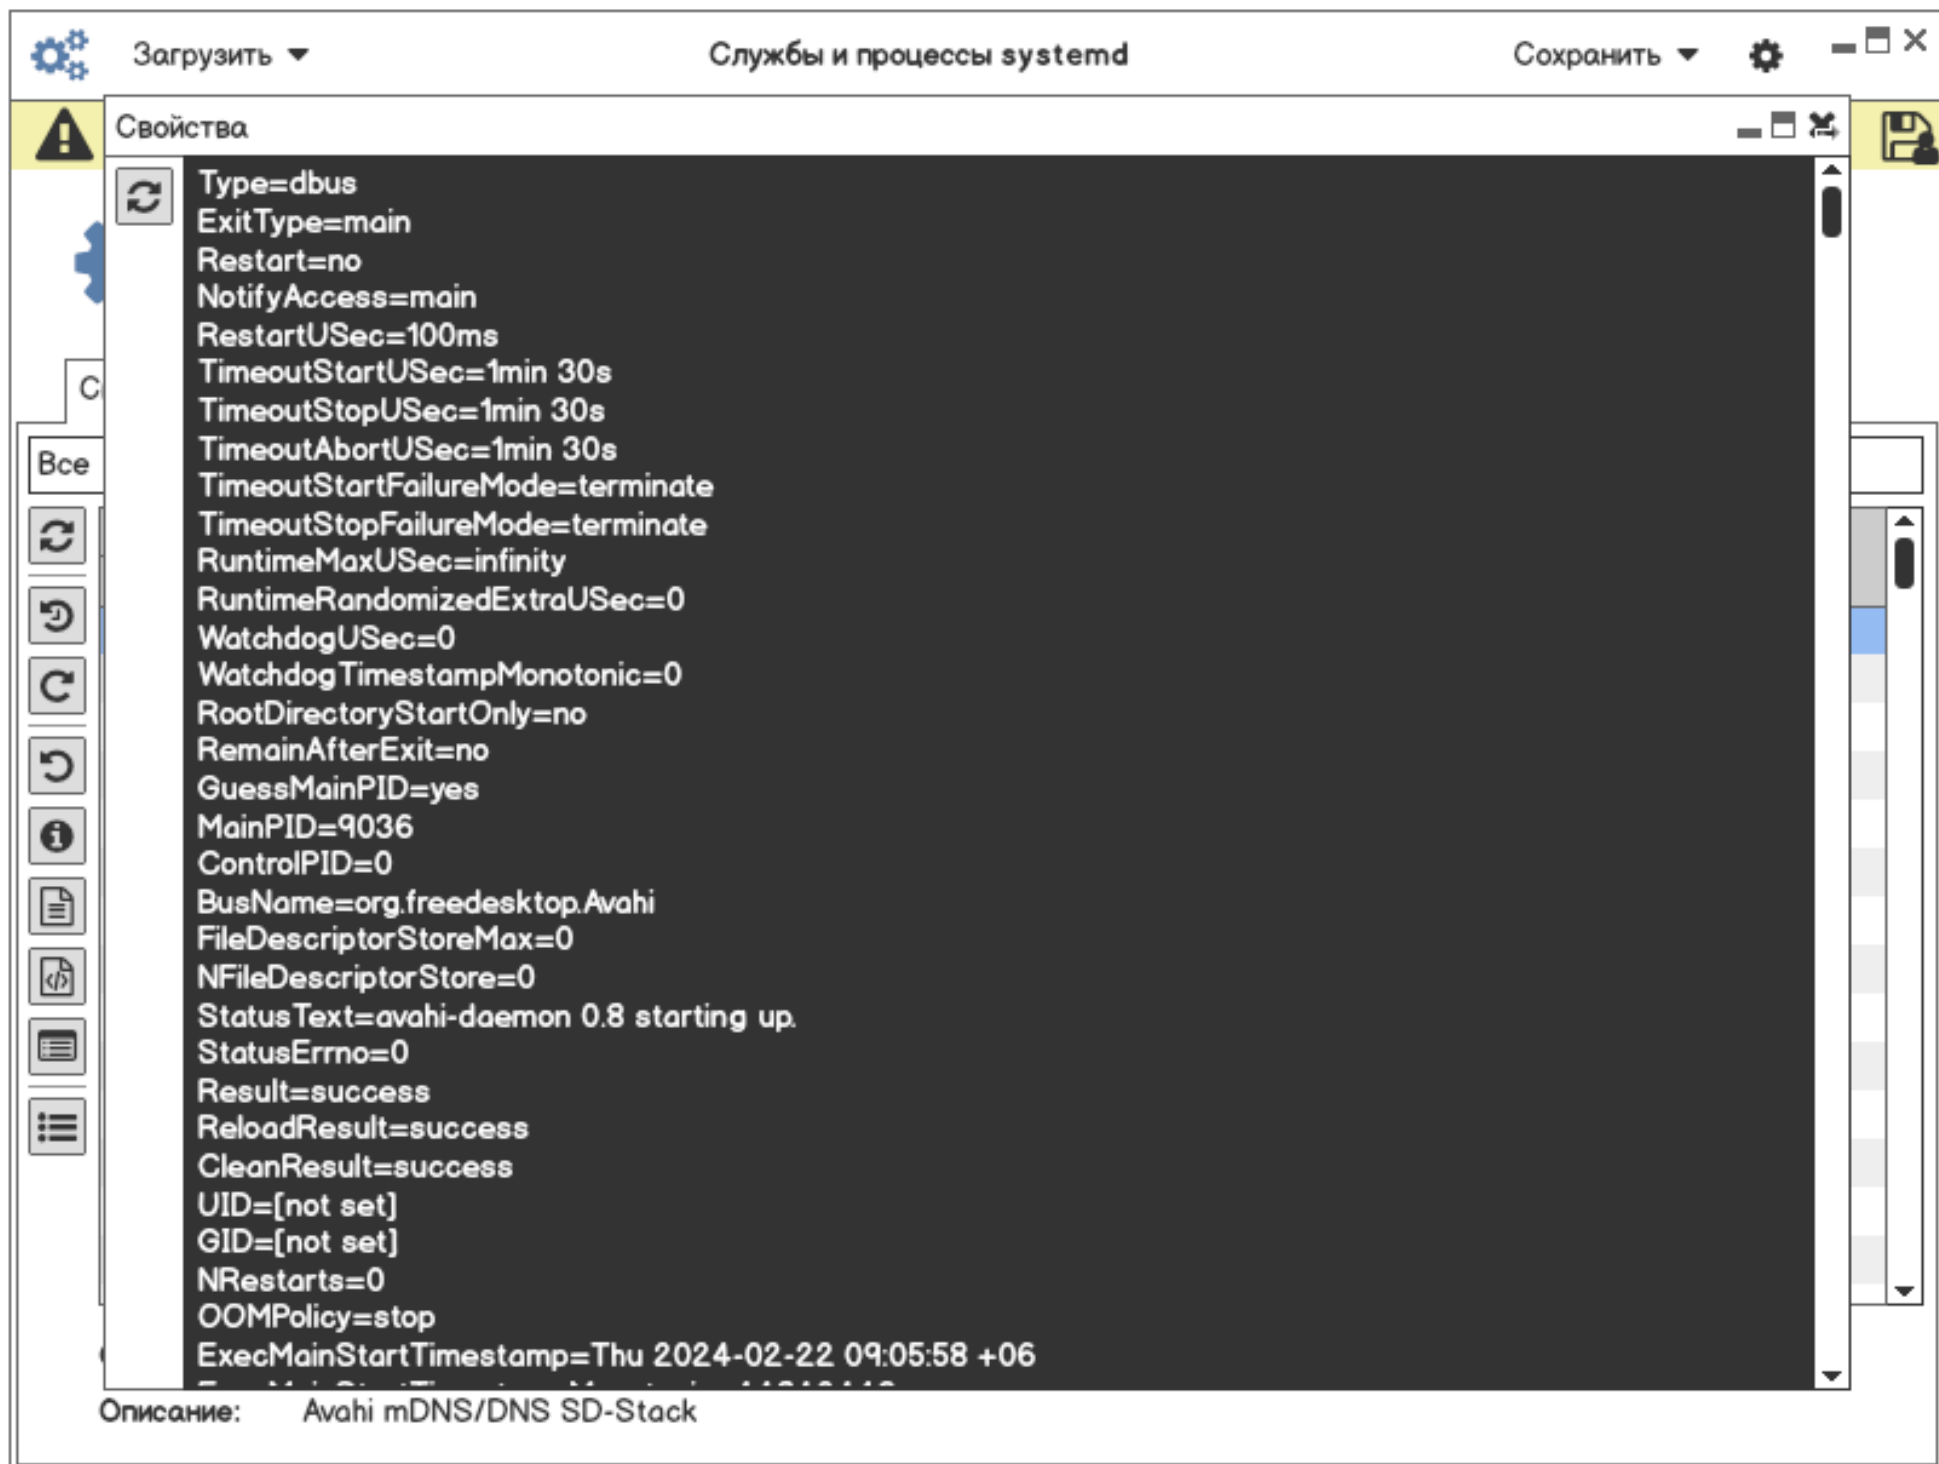

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Состояние avahi-daemon.service

- avahi-daemon.service - Avahi mDNS/DNS-SD Stack
 - Loaded: loaded (/usr/lib/systemd/system/avahi-daemon.service; enabled; vendor preset: disabled)
 - Active: **active (running)** since Mon 2023-06-26 09:56:52 +06, 6h ago
 - TriggeredBy: • avahi-daemon.socket
 - Main PID: 9200 (avahi-daemon)
 - Status: "avahi-daemon 0.8 starting up."
 - Tasks: 2 (limit: 19041)
 - Memory: 1.5M
 - CPU: 507ms
 - CGroup: /system.slice/avahi-daemon.service
 - └─9200 "avahi-daemon: running mmx166-pc.local"
 - └─9226 "avahi-daemon: chroot helper"

июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Registering new address record for fe80::6e8d:24a9:9e57:deae on enp2s0.*.

июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Joining mDNS multicast group on interface vmnet1.IPv6 with address fe80::250:56ff:fec0:1.

июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: New relevant interface vmnet1.IPv6 for mDNS.

июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Registering new address record for fe80::250:56ff:fec0:1 on vmnet1.*.

июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Joining mDNS multicast group on interface vmnet8.IPv6 with address fe80::250:56ff:fec0:8.

июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: New relevant interface vmnet8.IPv6 for mDNS.

июн 26 09:56:55 mmx166-pc avahi-daemon[9200]: Registering new address record for fe80::250:56ff:fec0:8 on vmnet8.*.

июн 26 09:56:57 mmx166-pc avahi-daemon[9200]: Joining mDNS multicast group on interface enp2s0.IPv4 with address 192.168.215.18.

июн 26 09:56:57 mmx166-pc avahi-daemon[9200]: New relevant interface enp2s0.IPv4 for mDNS.

июн 26 09:56:57 mmx166-pc avahi-daemon[9200]: Registering new address record for 192.168.215.18 on enp2s0.IPv4.

Описание: Avahi mDNS/DNS SD-Stack

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Просмотр лога avahi-daemon.service

фев 21 16:22:54 mmx166-pc systemd[1]: Starting Avahi mDNS/DNS-SD Stack...
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: Found user 'avahi' (UID 84) and group 'avahi' (GID 84).
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: Successfully dropped root privileges.
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: avahi-daemon 0.8 starting up.
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: Successfully called chroot().
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: Successfully dropped remaining capabilities.
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: No service file found in /etc/avahi/services.
фев 21 16:22:54 mmx166-pc systemd[1]: Started Avahi mDNS/DNS-SD Stack.
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface lo.IPv4 with address 127.0.0.1.
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: New relevant interface lo.IPv4 for mDNS.
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: Network interface enumeration completed.
фев 21 16:22:54 mmx166-pc avahi-daemon[9142]: Registering new address record for 127.0.0.1 on lo.IPv4.
фев 21 16:22:55 mmx166-pc avahi-daemon[9142]: Server startup complete. Host name is mmx166-pc.local. Local service cookie is 882637154.
фев 21 16:22:55 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface vmnet1.IPv4 with address 192.168.208.1.
фев 21 16:22:55 mmx166-pc avahi-daemon[9142]: New relevant interface vmnet1.IPv4 for mDNS.
фев 21 16:22:55 mmx166-pc avahi-daemon[9142]: Registering new address record for 192.168.208.1 on vmnet1.IPv4.
фев 21 16:22:55 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface vmnet8.IPv4 with address 192.168.222.1.
фев 21 16:22:55 mmx166-pc avahi-daemon[9142]: New relevant interface vmnet8.IPv4 for mDNS.
фев 21 16:22:55 mmx166-pc avahi-daemon[9142]: Registering new address record for 192.168.222.1 on vmnet8.IPv4.
фев 21 16:22:58 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface enp2s0.IPv6 with address fe80::bb6d:d853:6635:c011.
фев 21 16:22:58 mmx166-pc avahi-daemon[9142]: New relevant interface enp2s0.IPv6 for mDNS.
фев 21 16:22:58 mmx166-pc avahi-daemon[9142]: Registering new address record for fe80::bb6d:d853:6635:c011 on enp2s0.*.
фев 21 16:23:05 mmx166-pc avahi-daemon[9142]: Joining mDNS multicast group on interface enp2s0.IPv4 with address 192.168.215.18.

Описание: Avahi mDNS/DNS SD-Stack

The image shows a window titled "Службы и процессы systemd" (Systemd Services and Processes). At the top, there are buttons for "Загрузить" (Load) and "Сохранить" (Save), along with a warning icon and the text "Внимание!". Below the title bar, there's a header area with the title "Службы и процессы systemd" and the subtitle "Настройка работы служб и процессов системы" (System service and process configuration). A navigation bar contains tabs: "Системные юниты" (System units), "Пользовательские юниты" (User units), "Конфигурационные файлы" (Configuration files), "Сессии" (Sessions), and "Таймеры" (Timers). The "Конфигурационные файлы" tab is active. Below the tabs, there's a search bar with "obex" entered. To the left of the search bar are checkboxes for "Показать не активные" (Show inactive) and "Показать не загруженные" (Show not loaded). The main area is a table with columns: "Настройка в конфигурации" (Configuration settings), "Настройка в системе" (System settings), and "Служба" (Service). The "Настройка в конфигурации" column has sub-columns: "Автостарт" (Autostart), "Автостоп" (Autostop), and "Блокировать" (Block). The "Настройка в системе" column has sub-columns: "Автостарт" (Autostart), "Запущена" (Running), and "Юнит" (Unit). The "Служба" column lists the service name. The first row shows the "obex.service" service, which is running. A context menu is open over the "obex.service" entry, listing options: "Статус сервисов пользователя" (User service status), "Установленные юнит-файлы" (Installed unit files), "Список юнитов и состояния" (List units and states), "Список сокетов и состояния" (List sockets and states), and "Список таймеров и состояния" (List timers and states). At the bottom, there's a description: "Описание: Service Bluetooth OBEX".

Загрузить ▾

Службы и процессы systemd

Сохранить ▾

Внимание!

Службы и процессы systemd

Настройка работы служб и процессов системы

Системные юниты → Пользовательские юниты → Конфигурационные файлы → Сессии → Таймеры →

Все ▾ ☐ Показать не активные ☐ Показать не загруженные

Автозапуск в конфигурации
 Остановленные в конфигурации
 Заблокированные в конфигурации
 service
 mount
 swap
 socket
 target
 device
 automount
 timer
 path
 slice
 scope

Имя	Настройка в системе			Служба
	Автостарт	Запущена	Юнит	
obex.service	☒	☒	запущен	obex.service →

Служба: obex.service
 Описание: Service Bluetooth OBEX



Внимание!



Службы и процессы systemd

Настройка работы служб и процессов системы

Системные юниты

Пользовательские юниты

Конфигурационные файлы

Сессии

Таймеры

Bce

☐ Показать не активные☐ Показать не загруженные

obex



Настройка в конфигурации

Настройка в системе

Служба



Автостарт

Автоостоп

Блокировать

Автостарт

Запущена

Юнит

запушен

obex.service



obex.service



Описание: Service Bluetooth OBEX



Файл юнита: `/usr/lib/systemd/user/obex.service`



Состояние файла юнита: отключен



Активирован: 12:11:33 04.03.2024



Деактивирован: нет данных




Служба: obex.service


Описание: Service Bluetooth OBEX

The screenshot shows a window titled "Службы и процессы systemd" (Systemd Services and Processes). The window has a top bar with a "Загрузить" (Load) button, a "Сохранить" (Save) button, and standard window controls. Below the title bar, there is a tab labeled "Состояние obex.service" (Status of obex.service). The main content area displays the following information:

- obex.service - Bluetooth OBEX service
- Loaded: loaded (/usr/lib/systemd/user/obex.service; disabled; vendor preset: enabled)
- Active: **active (running)** since Wed 2024-03-06 09:13:57 +06; 3h 45min ago
- Main PID: 10771
- Tasks: 1 (limit: 19041)
- Memory: 1.8M
- CPU: 10ms
- CGroup: /user.slice/user-1000.slice/user@1000.service/app.slice/obex.service
 - └─10771 /usr/lib/bluetooth/obexd

On the left side of the window, there is a sidebar with a "Все" (All) button and a vertical list of icons representing different service states or actions. At the bottom of the window, there is a description field labeled "Описание:" (Description) with the text "Service Bluetooth OBEX".

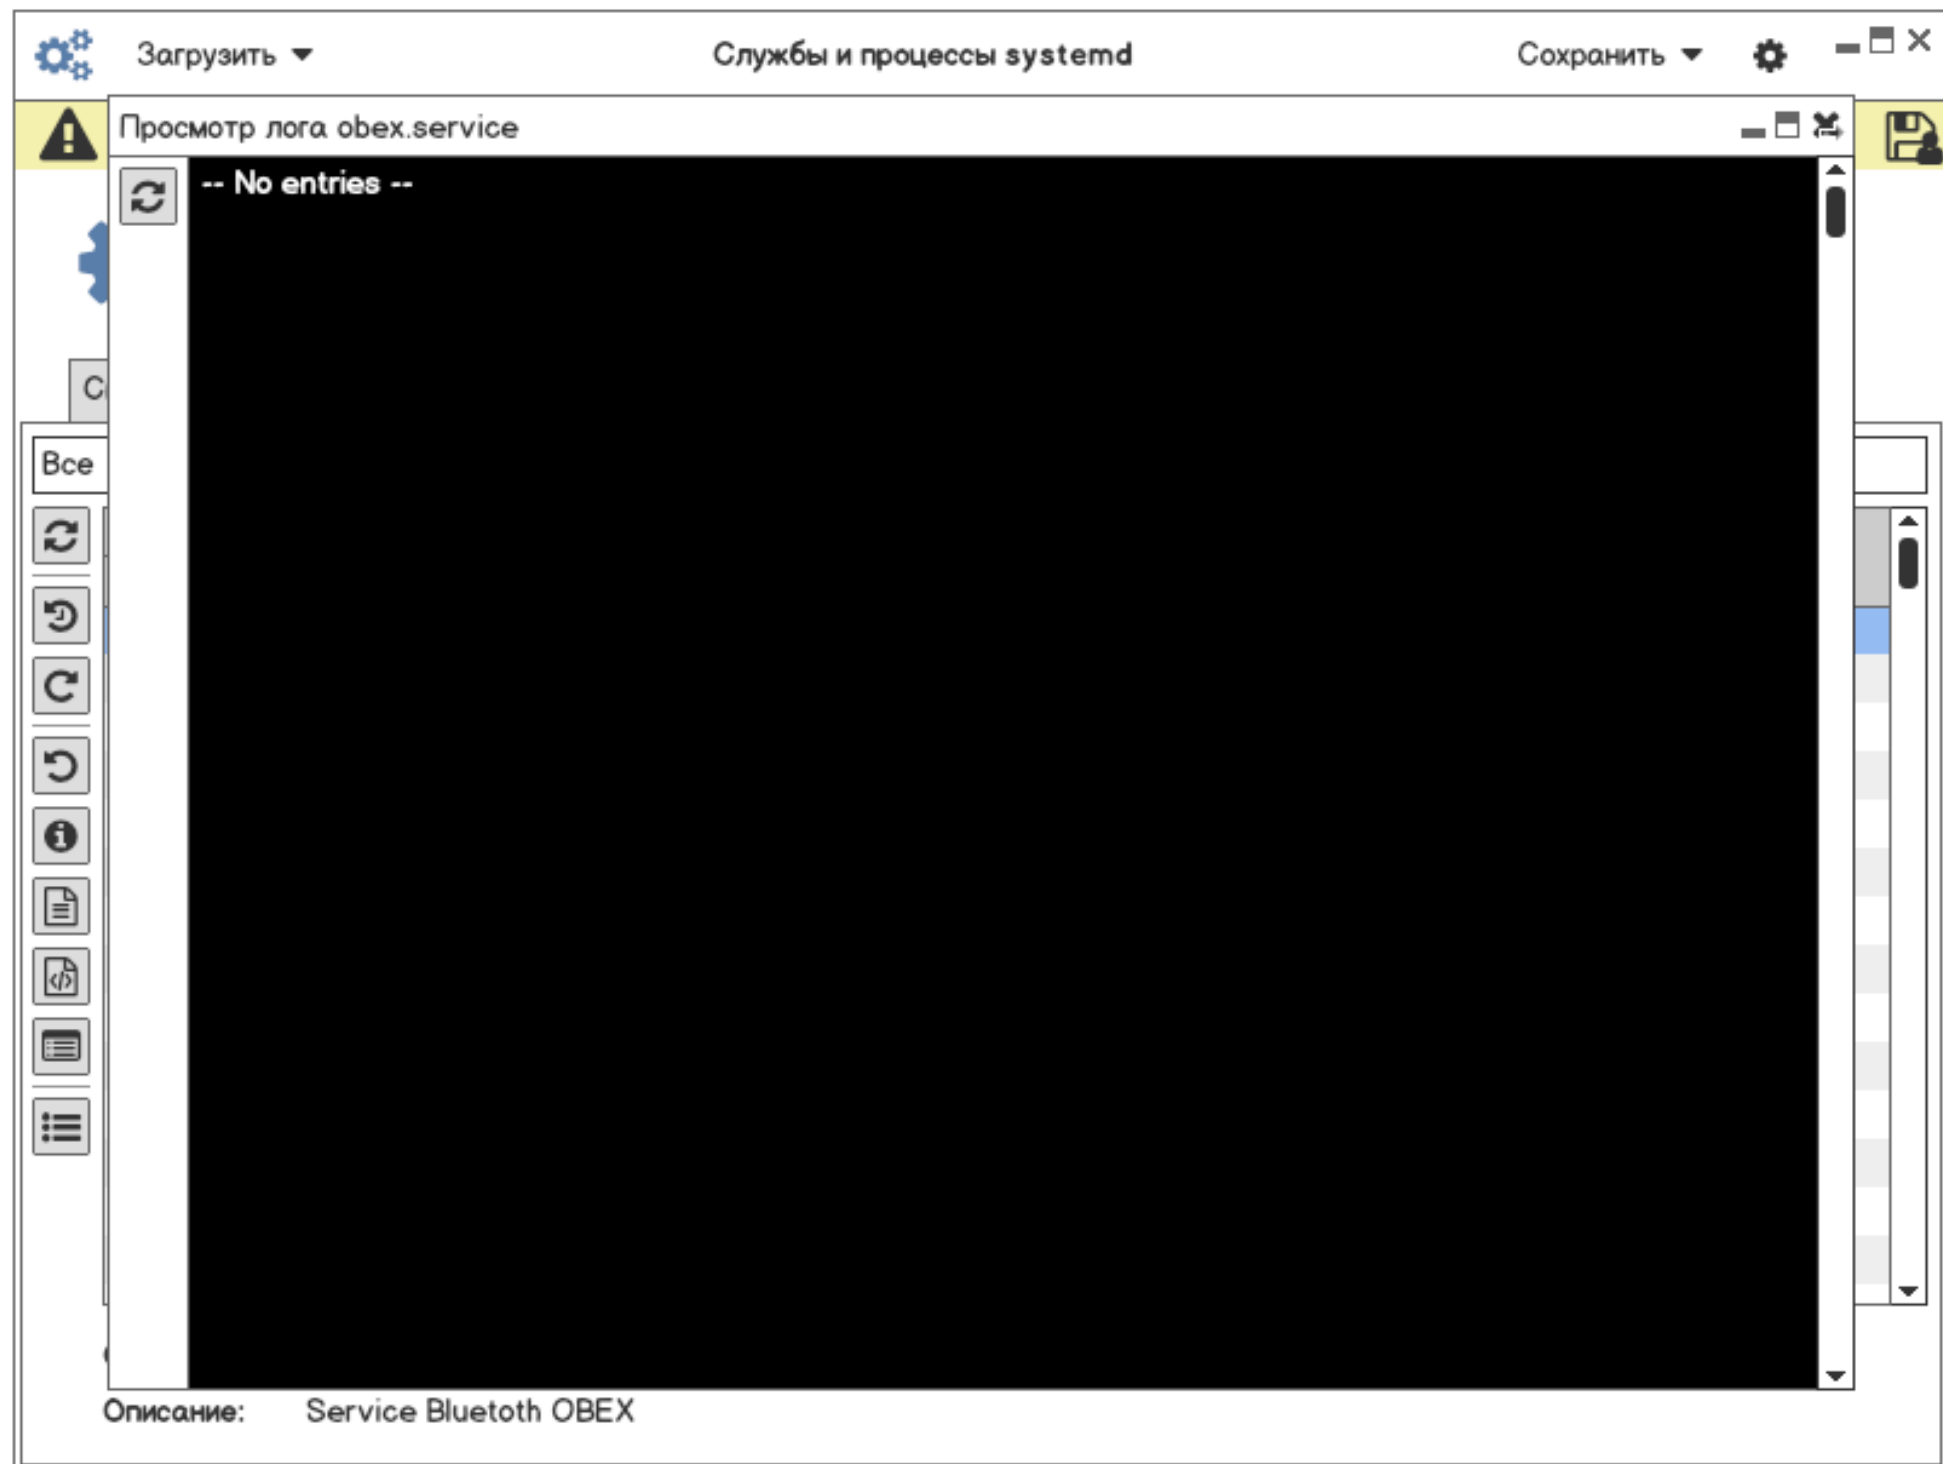

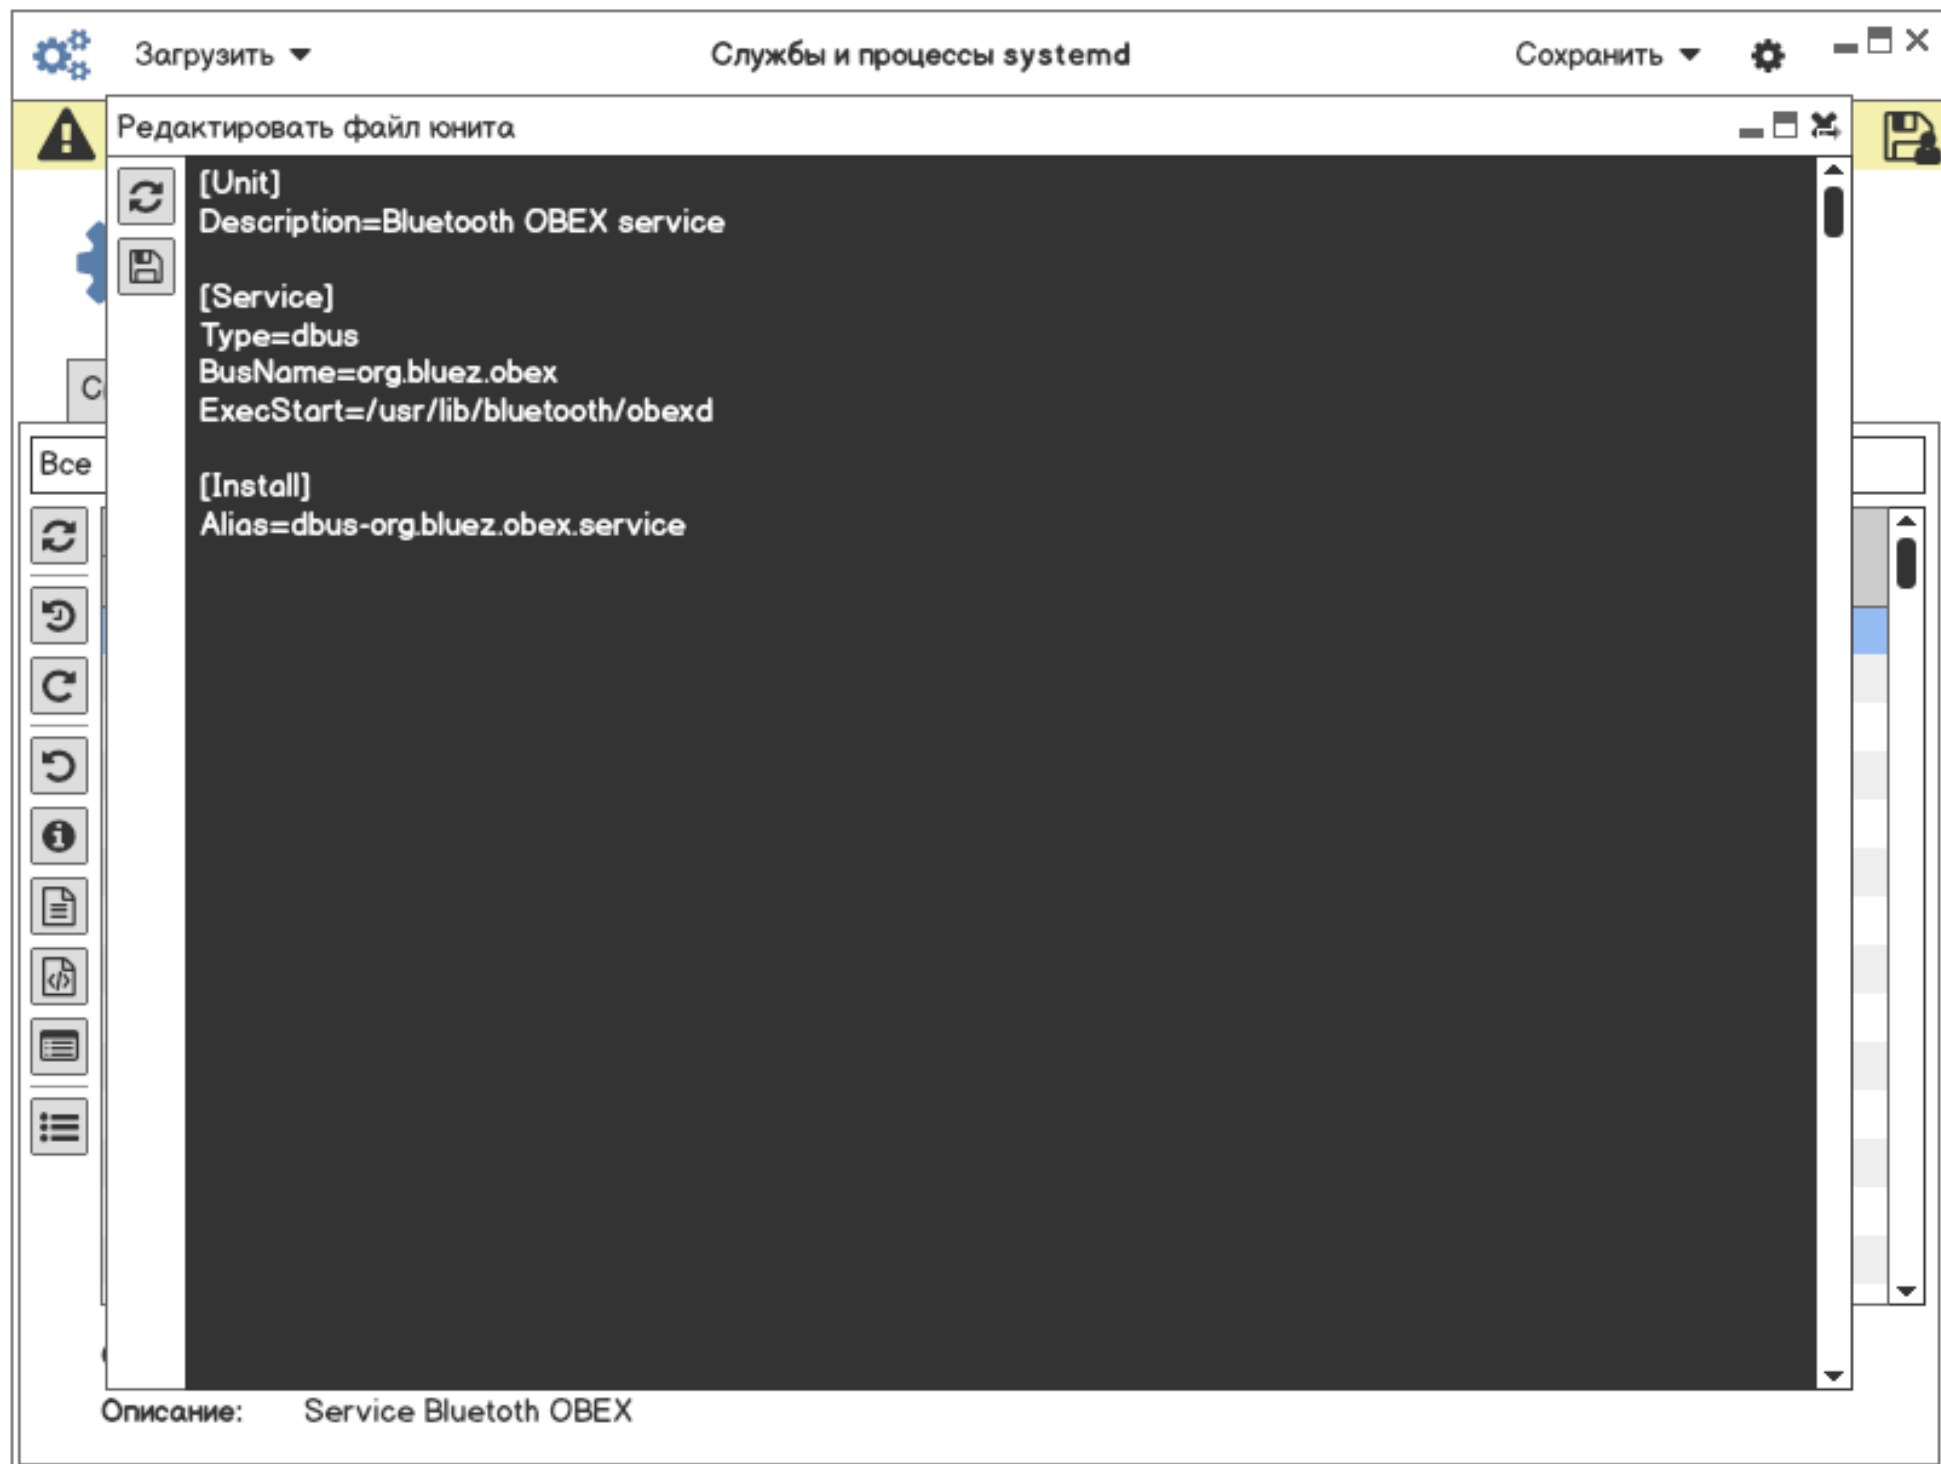

Загрузить ▾ Службы и процессы systemd Сохранить ▾

Свойства

ExitType=main
Restart=no
NotifyAccess=none
RestartUsec=100ms
TimeoutStartUsec=1min 30s
TimeoutStopUsec=1min 30s
TimeoutAbortUsec=1min 30s
TimeoutStartFailureMode=terminate
TimeoutStopFailureMode=terminate
RuntimeMaxUsec=infinity
RuntimeRandomizedExtraUsec=0
WatchdogUsec=infinity
WatchdogTimestampMonotonic=0
RootDirectoryStartOnly=no
RemainAfterExit=no
GuessMainPID=yes
MainPID=0
ControlPID=0
FileDescriptorStoreMax=0
NFileDescriptorStore=0
StatusErrno=0
Result=success
ReloadResult=success
CleanResult=success
UID=[not set]
GID=[not set]
NRestarts=0
ExecMainStartTimestampMonotonic=0
ExecMainExitTimestampMonotonic=0
ExecMainPID=0
ExecMainCode=0
ExecMainStatus=0

Описание: Service Bluetooth OBEX





Загрузить ▾ →

Службы и процессы systemd

Сохранить ▼ →



Внимание!



Службы и процессы systemd

Настройка работы служб и процессов системы

Системные юниты

Пользовательские юниты

Конфигурационные файлы

Сессии

Таймеры



ID Сессии

2

Статус

АКТИВНО

ID пользователя

1000

Имя пользователя

miramax166

Seat ID

seat0



[illegible]



Настройка работы служб и процессов системы

Таймеры

[illegible]

